


Drop-Tab Self-Lock

The VES-Artex Drop-Tab Self-Locks (DSLGL) are designed for producers who need strength, reliability, and ease of operation in demanding dairy environments. The heavy-duty construction provides added durability while allowing staff to safely restrain multiple animals at once for physical examinations, vaccinations, artificial insemination, pregnancy checks, and routine treatments.

Designed with both animals and operators in mind, the DSLGL features quiet rubber bumpers, reinforced drop tabs, and an ear protector plate for secure, low-stress lockup. The drop-tab design allows animals to be released easily-even under side load-while the spring-loaded control handle locks securely in both the open and closed positions. Fully hot-dip galvanized construction and a bolt-together control rod provide long-lasting corrosion protection and simplify installation.

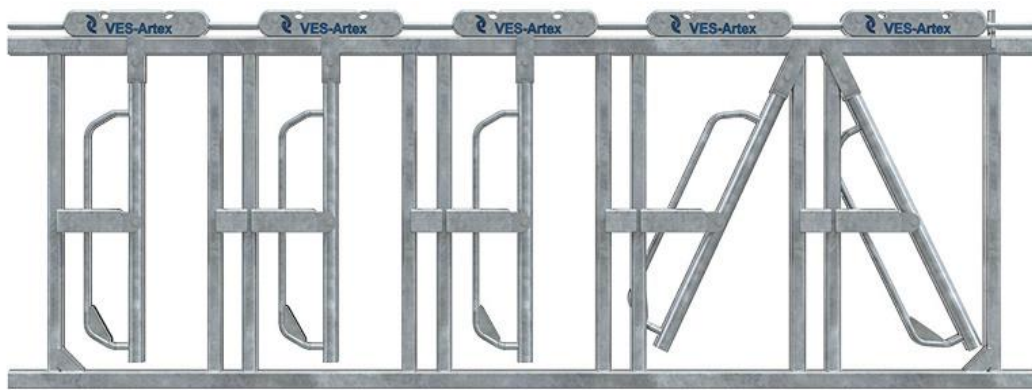

FEATURES

- **Heavy-Duty Construction** - 2" x 2" x 1/8" (50 x 50 x 3 mm) horizontal frame and 1-5/8" x 1/8" (42 mm OD x 3 mm) vertical frame provide increased strength and durability.
- **More Steel Where It Matters** - At 246 lbs. Per 5-in-10 section, the DSLGL features significantly heavier construction than the 162 lb SLG.
- **Quiet Operation** - Rubber bumpers eliminate metal-on-metal contact at the swing arm for quieter animal handling.
- **Easy, Reliable Unlocking** - Drop-tab design allows headlocks to release easily, even when animals are applying pressure to swingarms.
- **Secure Lockup** - Ear protector plates help prevent accidental unlocking, while reinforced drop tabs resist bending and failure.
- **Spring-Loaded Control Handle** - Locks securely in both the open and closed positions for simple operation.
- **Improved Animal Access** - Provides arm access while animals are locked for vaccination, treatment, and routine herd management.
- **Faster Installation** - Flush and tilt mount clamps designed for simplified installation, while bolt-together control rod eliminates field welding.
- **Fully Hot-Dip Galvanized** - Complete galvanization provides long-term corrosion protection and extended headlock life.

Drop-Tab Self-Lock

Mature Holstein — Hot Dipped

Item Number	Description	# of Openings	Length		Height – Top to Bottom of Frame		Animal Spacing		Neck Opening		Top Opening		Bottom Opening	
			ft	m	inch	mm	inch	mm	Inch	mm	Inch	mm	Inch	mm
121243	DSL-G-2.44M (8') Rail	4	8	2.44	40	1016	22-1/2	572	7-7/16	188	16-5/8	422	15-3/8	390
102392	DSL-G-3.05M (10') Rail	5	10	3.05	40	1016	22-1/2	572	7-7/16	188	16-5/8	422	15-3/8	390
102394	DSL-G-3.66M (12') Rail	6	12	3.66	40	1016	22-1/2	572	7-7/16	188	16-5/8	422	15-3/8	390

Control Handle

Item Number	Description	Notes
102398	Control Rod Handle Assembly, DSLG	
120415	DSL-G Control Rod Connector, 140mm Length	One required per headlock

Flush Mount Bracket

Post Size (in)	Post Style	Location	Method	Item Number	Notes
2-7/8 & 3	Round	Top & Bottom	U Bolt	120966	QTY 2 per part #
3-1/2	Round	Top & Bottom	U Bolt	120967	QTY 2 per part #
4	Round	Top & Bottom	U Bolt	120968	QTY 2 per part #
4-1/2	Round	Top & Bottom	U Bolt	120969	QTY 2 per part #
Any	Square	Top & Bottom	Weld/Bolt On	120970	QTY 2 per part #

Tilt Mount Bracket

Post Size (in)	Post Style	Location	Method	Item Number	Notes
2-7/8 & 3	Round	Top	U Bolt	120789	QTY 1 per part #
3-1/2	Round	Top	U Bolt	120947	QTY 1 per part #
4	Round	Top	U Bolt	120784	QTY 1 per part #
4-1/2	Round	Top	U Bolt	120948	QTY 1 per part #
Any	Square	Top	Weld/Bolt On	120808	QTY 1 per part #
3	Round	Bottom	Bolt On	107431(A-30801)	
3	Round	Bottom	Bolt On	107694(A-33252)	
3	Round	Bottom	Bolt On	108044(A-36244)	
4	Round	Bottom	Bolt On	107877(A-34919)	
4	Round	Bottom	Bolt On	106059(A-34955)	
Any	Round	Bottom	Weld On	106617(A-23616)	
Any	Round	Bottom	Weld On	106661(A-23687)	
Any	Square	Bottom	Weld On	107364(A-29985)	
Any	Square	Bottom	Bolt On	106609(A-23598)	
Any	Square	Bottom	Bolt On	116872	